

Stephen H Flat – Bariatric

Essential design



CHAIR

Frequent usage

Chemotherapy

Infusions Therapy

Day Hospital

Blood donor

Blood samples

Emergency

Dialysis

Patient's transport

Dermatology / Cosmetics

Multifunctional

Bariatrics



ARMRESTS MOVEMENT IS SYNCHRONIZED WITH THE BACKREST



HEIGHT ADJUSTABLE THROUGH MOTORIZED COLUMNS



Benefits

- Anti-tilt frame, it prevents any tilt in every operative conditions.
- Frame painted with epoxy paints enriched with antibacterial. Available in a wide range of colours.
- Independent movements of back and seat through two dedicated motors.
- Height adjustment through no.2 motorized columns.
- Three separate cushions for back, seat and leg functional for a perfect ergonomomy and posture preventing decubitous wounds.
- The upholstery is completely removable allowing a thorough and effective sanitization reducing the risks of cross infections. A wide range of colours is available.
- Upholstery's features: antibacterial, flame retardant class 11M, antimycotic, ecologic, latex free, phtalate free and resistant.
- Armrest's movements synchronized with the backrest.
- Available with a wide range of functional and exclusive accessories (see accessories catalogue).
- Excellent and ergonomic posture with decubitus wound preventive effect.
- Braking system ensures high stability to the device.
- Easily sanitizable with the most common used detergents.
- Armrest with multiple adjusment functions.
- Max load capacity 300kg.

THE CUSHIONS ARE FULLY REMOVABLE ALLOWING AN EASY SANITIZATION OF THE DEVICE. SURFACE IN NON-POROUS HPL PANELS.



Standard features

- Painted steel frame in thermosetting powder. Wide range of colours at page 5.
- Lying surface divided in 4 sections (headrest, backrest, seat and leg).
- The chair can be adjusted through 5 motors:
 - No.2 motors for the independent adjustment of the back and leg sections - Equipment code AC12.
 - No.1 motor for the inclination of the seat - Equipment code AC35/1.
 - No.2 motorized columns for the height adjustment - Equipment code AC28/300.
- 10° Trendelenburg position (shock position as alternative).
- Headrest joint to the backrest.
- The armrests are completely removable and can be rotate, tilted and overturned at 90°; (please refer to the accessories catalogue for other version of armrests).
- No. 4 wheels Ø 100mm antistatic, sturdy, stainless and swivable.
- Simultaneous brake on 4 wheels with directional system made in chromed steel, activated through bilateral rear pedals- Equipment code AC7P2G.
- Chair's movements are controlled by a 10 buttons handset with a 3,5mtl coiled cable; For patient's safety purpose the handset is provided with an inhibition key, equipment code AC34P. The handset is user friendly and has visual pictograms useful for partially sighted people. Insulation IP66.
- Bilateral handset support - Equipment code AC25P.
- ABS base cover - Equipment code AC83H.
- Easily removable soft foam independent cushions.
- Upholstery in flame retardant leatherette UNI 9175/87 e 9175FA-1/94 class 11M - Equipment code AC87/1.

Armrests' movements



ARMREST: ROTATION



ARMREST: INCLINATION



ARMREST: 90° OVERTURN
FOR EASY ACCESS




10 BUTTONS HANDSET WITH MEMORY FUNCTION FOR 1 UP TO 4 MOTORS

Chair's movements are controlled by a 10 buttons handset with a 3,5mtl coiled cable; For patient's safety purpose the handset is provided with an inhibition key, equipment code AC34P. The handset is user friendly and has visual pictograms useful for partially sighted people. Insulation IP66.




13 BUTTONS HANDSET WITH MEMORY FUNCTION (5 MOTORS VERSION) - ACCESSORY CODE AC6MP

Movements

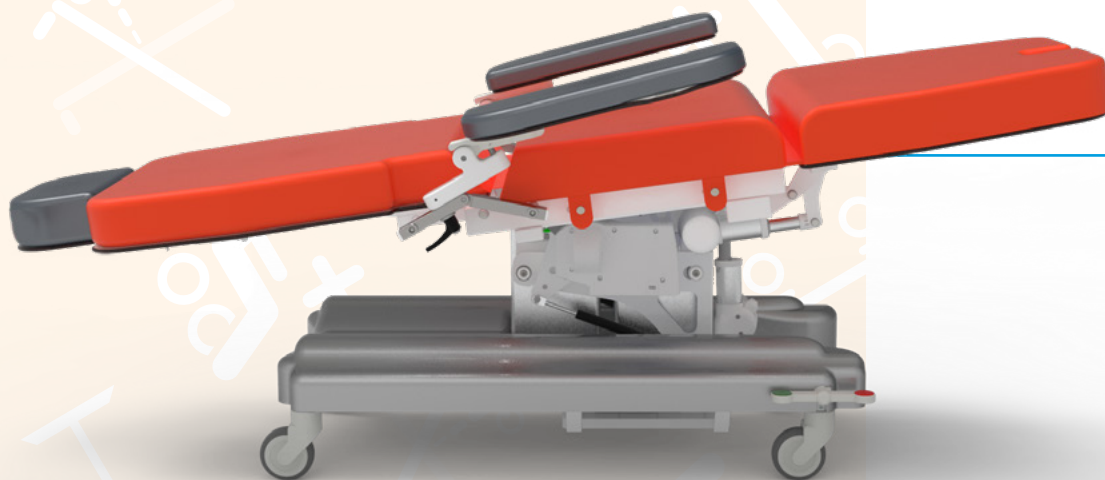

TRENDELENBURG

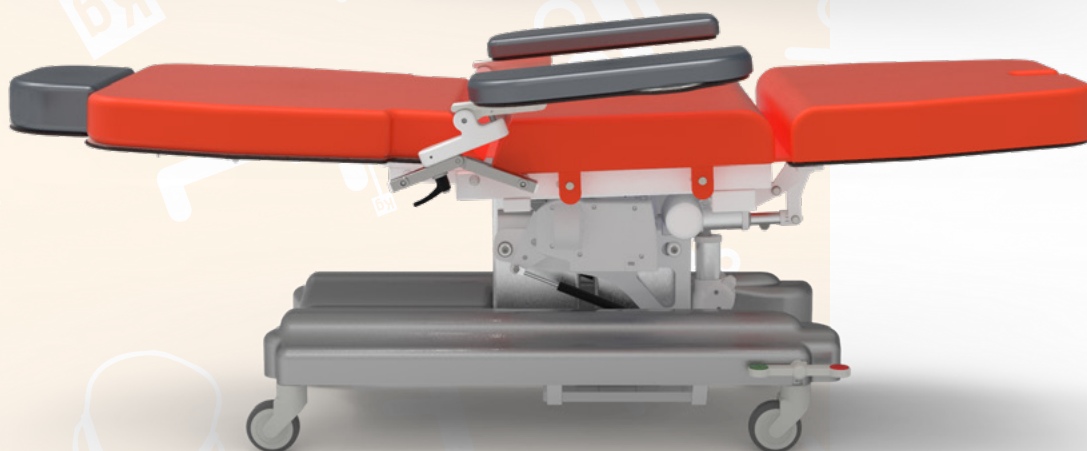

CLINOSTATIC
















RECLINER POSITION

Colour chart




























FRAME COLOURS





















The entire structure of the chair is protected by epoxy and thermosetting paints. The paints are enriched with antibacterial upon request. Wether not specified the frame of the device will be painted in white 9010.

 Code 2004	 Code 5012	 Code 7035
 Code 3020	 Code 6027	 Code 9005
 Code 1018	 Code 6018	 Code 9010
 Code 1021	 Code 7001	 Code 4010
 Code 5010	 Code 9006	



COLOURS FOR STANDARD UPHOLSTERY

 Code 5947	 Code 0872	 Code 0014
 Code 5948	 Code 4947	 Code 0027
 Code 0680	 Code 1944	 Code 0006
 Code 0508	 Code 4008	 Code 0346
 Code 0041	 Code 1946	 Code 016043
 Code 0064	 Code 4933	 Code 011499
 Code 0055	 Code 0430	 Code 015815
 Code 1816	 Code 0151	 Code 015814
 Code 0833	 Code 0667	 Code 016042

COLOURS FOR SILICONIC UPHOLSTERY (THEY HAVE A HIGHER PRICE) ACCESSORY CODE AC87

 Code 7039.08	 Code 7039.14	 Code TH.439
 Code 7039.06	 Code TH.513	 Code TH.438
 Code 7039.17	 Code TH.511	 Code TH.322
 Code 7039.20	 Code TH.305	 Code TH.224
 Code 7039.10	 Code TH.378	 Code 312
 Code 7039.19	 Code TH.300	 Code TH.226
 Code 7039.13	 Code TH.510	

Dimensions

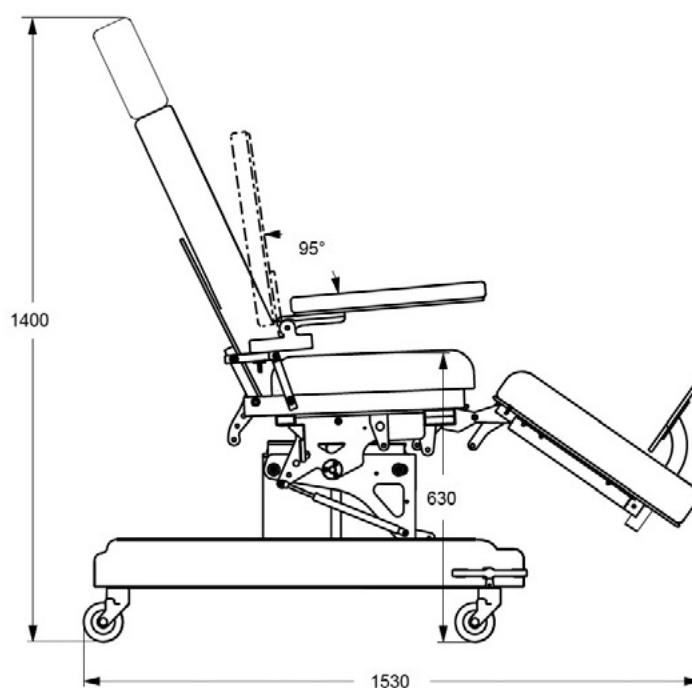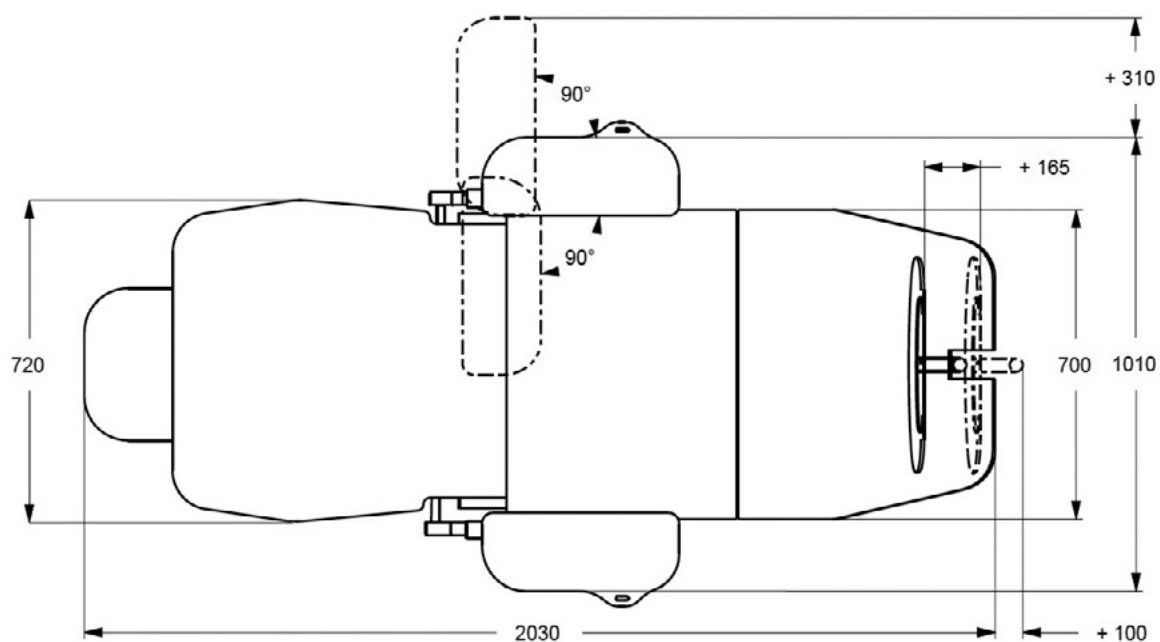

Technical sheet

GMDN Code	38447
ID Code	GB0002.BP Painted steel GB0002.BS Stainless
Inteded use	Multifunctional chair
Manufacturer	GARDHEN BILANCE SRL
Overall weight	100 kg
Wheels	No.4 Ø 100 mm swivable and stainless with braking system
Power	100 - 240 Vac 50/60 Hz
Electric motors	Low voltage 24 (Volt)
Max electrical input	4A
Insulation	IP44
Max load	300 kg
Safety working load	335 kg
Backrest angle	76° (customizable upon request)
Leg angle	45° (customizable upon request)

MAIN CORD



Type F - Schuko



Type L - 16A



Type I - Australia



Type B - Canada and USA



Type G - UK plug

For certifications please refer to "Certifications and Quality system" section

Pictures contained in this brochure is for illustrative purpose only. The manufacturer reserves the right to modify the projects without notice. For accessories identification please refer to the accessory catalogue or commercial offer. When data are different please refer to commercial offer.

Dep. EN_212 rev. 29/09/2021