

Unica

Multifunctional chair



SEATING

Frequent Usage

Day Hospital
Multifunctional



High

COMFORT

Inpatient and outpatient treatment



www.gardhenbalance.it






Unica

Movements


Synchronised back and leg sections

The movements of the synchronised back and leg sections are controlled by dedicated buttons on the handset.

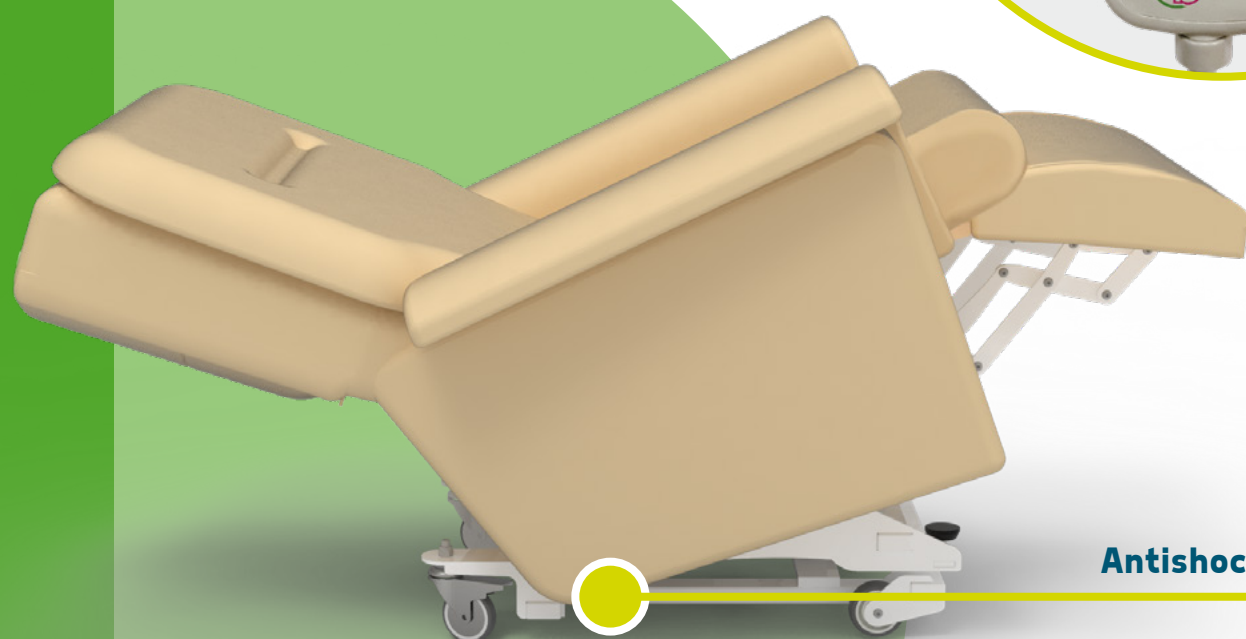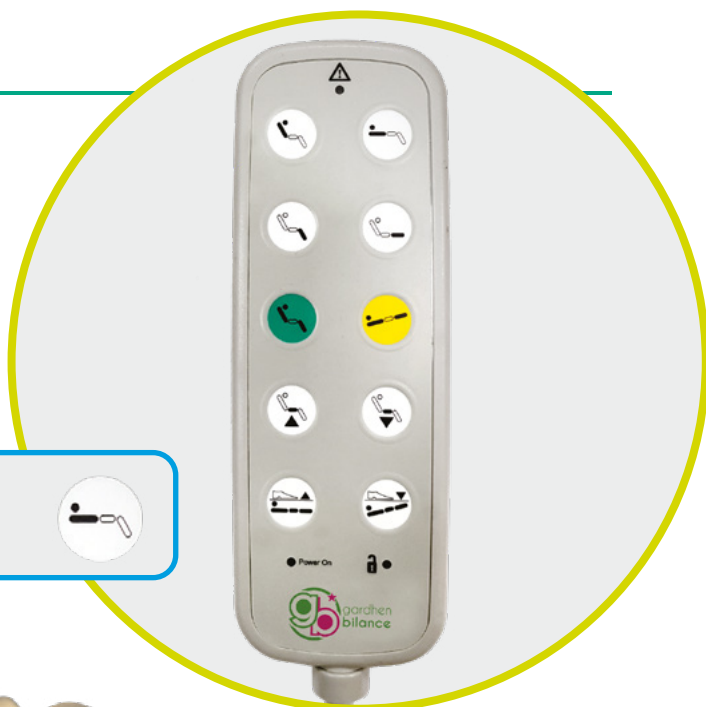

Antishock position

**Motorized and synchronized
extension/elevation
of the legrest**

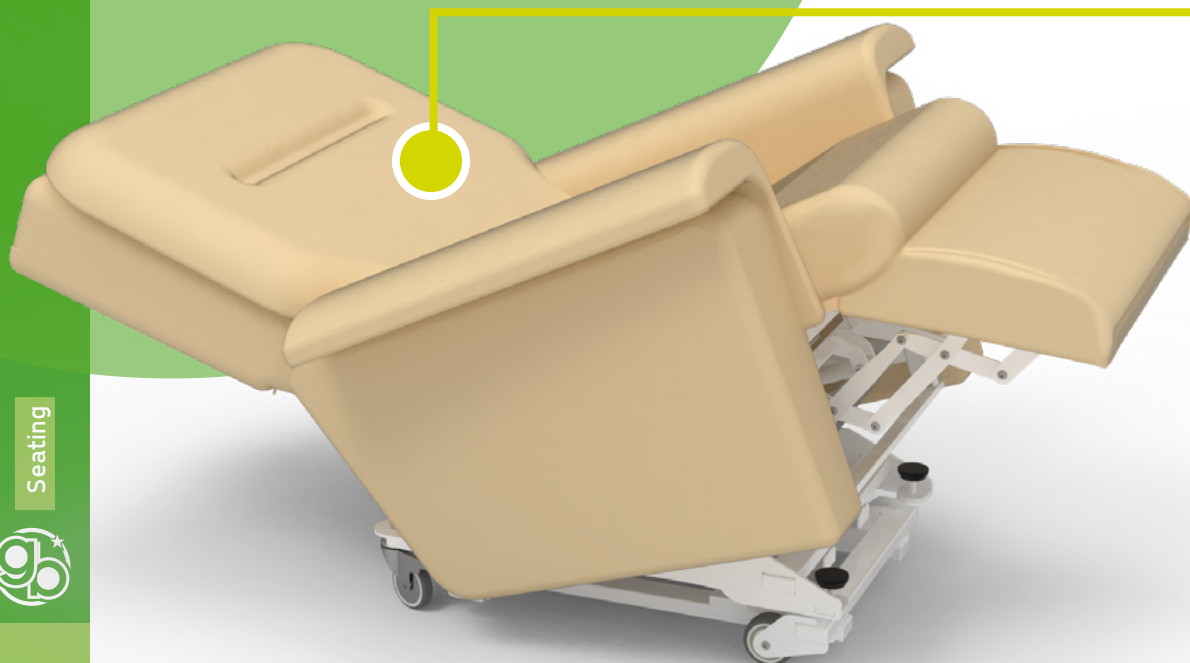



Other features of the medical device

- Frame painted with epoxy paints enriched with antibacterial. Available in a wide range of colours.
- Lying surface divided in 3 sections: backrest, seat and leg.
- Simultaneous movement of the back section and the leg section through 2 motors - Equipment code AC12.
- No. 4 stainless steel wheels (no. 2 swivable with brake and no. 2 fixed) Ø 60 mm.
- The movements of the chair are entirely controlled by a 10 buttons handset with a 3,5mtl coiled cable. The handset is user friendly and has visual pictograms useful for partially sighted people. The handset is provided with 10 buttons with 2 memories.
For patient's safety purpose the handset is provided with an inhibition key - Equipment code AC34P - Insulation IP66.
- Easily removable soft foam independent cushions.
- Upholstery in flame retardant leatherette UNI 9175/87 e 9175FA-1/94 class 1IM - Equipment code AC87/1.

Do you want to change the colour of the upholstery and frame?

Frame or click the QR codes and discover how to personalise your device by consulting our colour cards*.

*If no preference is expressed, the device will be delivered in the available colour.

**Upholstery
Leatherette**

**Coating
Silicon**

Frame



Do you want to improve the device?

Scan the QR Code to find out all the available accessories listed on our catalogue.



Technical sheet

CND/EMDN code	V08020101
GMDN Code	38447
N. progressive/R	2436238/R
UDI-DI di base	805771740POLPE
ID Product	GB0006.SP
Inteded use	Multifunctional chair
Manufacturer	GARDHEN BILANCE SRL

Overall weight	65 kg
Wheels	No.4 ø 60 mm 2 swivable with brake and 2 fixed
Power	100 - 240 Vac 50/60 Hz
Electric motors	Low voltage (24 V)
Max electrical input	4A
Isolamento	IP44
Max load	150 kg
Safety working load	185 kg

Main cord



Type F
Schuko



Type L
16A



Type I
Australia





Type B
Canada and USA



Type G
UK plug

Dimensions

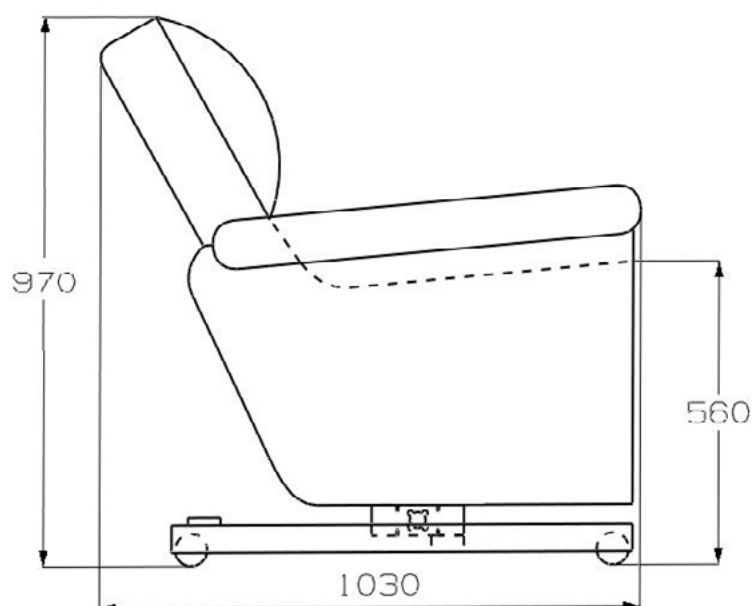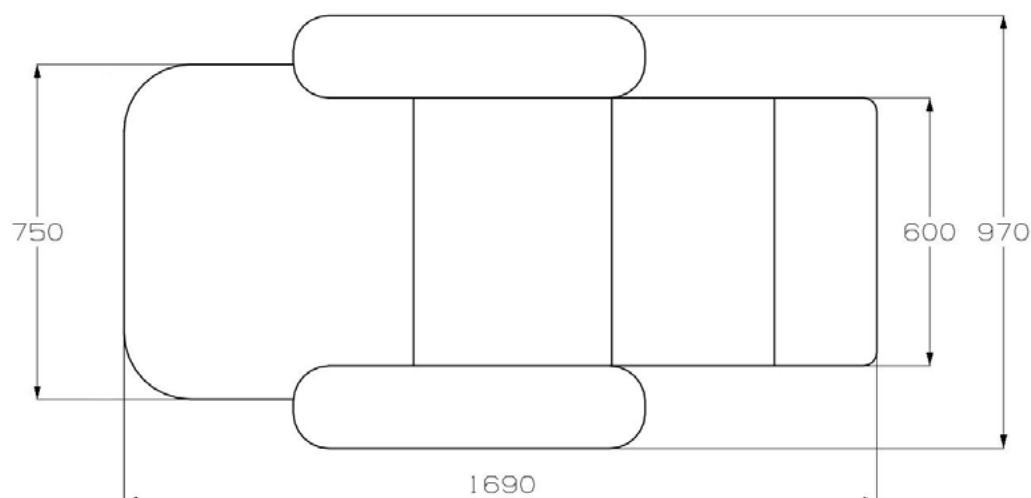

www.gardhenbalance.it



Gardhen Balance S.r.l.

Via G. Luraghi c/o Consorzio Il Sole - lotto S -
80038 Pomigliano d'Arco (NA) - Italy
Tel. +39.081.8692160 pbx - Fax +39.081.8692460
E-mail: info@gardhenbalance.it
PEC: gardhenbalance@pec.it

Pictures contained in this brochure is for illustrative purpose only.
The manufacturer reserves the right to modify the projects without
notice. For accessories identification please refer to the accessory
catalogue or commercial offer. When data are different please refer to
commercial offer.

Dep. EN_74 rev. 17/10/2024